APPLICATION FOR ELECTROMAGNETIC COMPATIBILITY DIRECTIVE

On Behalf of

Mid Ocean Brands B.V.

Christmas motif LED light

Model No.: CX1541

Prepared for	:	Mid Ocean Brands B.V.
Address	:	7/F., Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong

Prepared By	:	Shenzhen Alpha Product Testing Co., Ltd.
Address	:	Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103, Shenzhen, Guangdong, China

Report Number	:	A2404186-C01-R01
Date of Receipt	:	April 25, 2024
Date of Test	:	April 25, 2024
Date of Report	:	April 29, 2024
Version Number	:	V0
Test Result	:	Pass

ALPHA's reports is using a digital certificate that is trusted on Adobe's official server. If there is no digital certificate or the digital certificate shows damaged in your report. Please do not accept the report.

E-mail: service@a-lab.cn Tel: 4008-3008-95 Website: http://www.a-lab.cn.

TABLE OF CONTENTS

Description Page

1. Summary Of Standards And Results 7
1.1. Description of Standards and Results 7
2. General Information 8
2.1. Description of Device (EUT) 8
2.2. Accessories of Device (EUT) 8
2.3. Tested Supporting System Details 9
2.4. Block Diagram of connection between EUT and simulators 9
2.5. Test Mode Description 9
2.6. Test Facility 10
2.7. Measurement Uncertainty 10
2.8. Test Equipment List 11
3. Conducted Disturbance At Mains Terminals Test 14
3.1. Block Diagram of Test Setup 14
3.2. Test Standard 14
3.3. Power Line Conducted Emission Test Limits 14
3.4. Configuration of EUT on Test 15
3.5. Operating Condition of EUT 15
3.6. Test Procedure 15
3.7. Conducted Disturbance at Mains Terminals Test Results 16
4. Radiated Electromagnetic Disturbance Test 19
4.1. Block Diagram of Test Setup 19
4.2. Test Standard 19
4.3. Radiated Electromagnetic Disturbance Limits 19
4.4. EUT Configuration on Test 19
4.5. Operating Condition of EUT 20
4.6. Test Procedure 20
4.7. Radiated Electromagnetic Disturbance Test Results 21
5. Radiated Disturbance Test 25
5.1. Block Diagram of Test Setup 25
5.2. Test Standard 25
5.3. Radiated Disturbance Limit 25
5.4. Configuration of EUT on Test 25
5.5. Operating Condition of EUT 26
5.6. Test Procedure 26
5.7. Radiated Disturbance Test Result 27
6. Harmonic Current Test 30
6.1. Block Diagram of Test Setup 30
6.2. Test Standard 30
6.3. Harmonic Current Test Limits 30
6.4. Configuration of EUT on Test 31
6.5. Operating Condition of EUT 31
6.6. Test Procedure 31

6.7. Harmonic Current Test Results 32
7. Voltage Fluctuations & Flicker Test 33
7.1. Block Diagram of Test Setup 33
7.2. Test Standard 33
7.3. Voltage Fluctuation and Flicker Test Limits 33
7.4. Configuration of EUT on Test 34
7.5. Operating Condition of EUT 34
7.6. Test Procedure 34
7.7. Voltage Fluctuation and Flicker Test Results 35
8. Immunity Performance Criteria 36
9. Electrostatic Discharge Test 37
9.1. Block Diagram of Test Setup 37
9.2. Test Standard 37
9.3. Electrostatic Discharge Test Limits 37
9.4. Configuration of EUT on Test 37
9.5. Operating Condition of EUT 38
9.6. Test Procedure 38
9.7. Electrostatic Discharge Test Results 39
10. RF Field Strength Susceptibility Test 40
10.1. Block Diagram of Test Setup 40
10.2. Test Standard 40
10.3. RF Field Strength susceptibility Test Limits 40
10.4. Configuration of EUT on Test 40
10.5. Operating Condition of EUT 41
10.6. Test Procedure 41
10.7. RF Field Strength Susceptibility Test Results 42
11. Electrical Fast Transient/Burst Immunity Test 43
11.1. Block Diagram of Test Setup 43
11.2. Test Standard 43
11.3. Electrical Fast Transient/Burst Test Limits 43
11.4. Configuration of EUT on Test 43
11.5. Operating Condition of EUT 43
11.6. Test Procedure 43
11.7. Electrical Fast Transient/Burst immunity Test Results 45
12. Surge Test 46
12.1. Block Diagram of Test Setup 46
12.2. Surge Test Limits 46
12.3. Configuration of EUT on Test 47
12.4. Operating Condition of EUT 47
12.5. Test Procedure 47
12.6. Surge Test Results 48
13. Injected Currents Susceptibility Test 49
13.1. Block Diagram of Test Setup 49
13.2. Test Standard 49
13.3. Injected currents susceptibility Test Limits 49
13.4. Configuration of EUT on Test 50

13.5. Operating Condition of EUT 50
13.6. Test Procedure 50
13.7. Injected currents susceptibility Test Results 51
14. Magnetic Field Immunity Test 52
14.1. Block Diagram of Test Setup 52
14.2. Test Standard 52
14.3. magnetic field Test Limits 52
14.4. Configuration of EUT on Test 52
14.5. Operating Condition of EUT 53
14.6. Test Procedure 53
14.7. Magnetic field immunity Test Results 54
15. Voltage Dips And Interruptions Test 55
15.1. Block Diagram of Test Setup 55
15.2. Test Standard 55
15.3. Voltage dips and interruptions Test Limits 55
15.4. Configuration of EUT on Test 55
15.5. Operating Condition of EUT 55
15.6. Test Procedure 55
15.7. Voltage dips and interruptions Test Results 56
16. Photograph 57
16.1. Photos of Radiated Disturbance Test (InSemi Anechoic Chamber) 57
16.2. Photos of Radiated Electromagnetic Disturbance Test 57
16.3. Photos of Electrostatic Discharge Test 58
16.4. Photos of RF Field Strength Susceptibility Test 59
17. Photos Of The EUT 60

TEST REPORT DECLARATION

Applicant	:	Mid Ocean Brands B.V.
Address	:	7/F., Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong
Manufacturer	:	Mid Ocean Brands B.V.
Address	:	7/F., Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong
EUT Description	:	Christmas motif LED light
		(A) Model No. : CX1541
		(B) Trademark : N/A

Measurement Standard Used:

EN IEC 55015:2019+A11:2020

EN IEC 61547:2023

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed full responsibility for the accuracy and completeness of test. Also, this report shows that the EUT is technically compliant with the EN IEC 55015 and EN IEC 61547 requirements.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....: Lily Wang
Project Engineer

Approved by (name + signature).....: Reak Yang
Project Manager

Date of issue.....: April 29, 2024

Revision History

Revision	Issue Date	Revisions	Revised By
V0	April 29, 2024	Initial released Issue	Lily Wang

1. Summary Of Standards And Results

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

EMISSION			
Description of Test Item	**Standard**	**Limits**	**Results**
Disturbance Voltages at mains terminals	EN IEC55015:2019+A11:2020	Section 4.3 Table 2a	P
Radiated Electromagnetic Disturbance	EN IEC 55015:2019+A11:2020	Section 4.4 Table 3a	P
Radiated Disturbance	EN IEC 55015:2019+A11:2020	Section 4.4 Table 3b	P
Harmonic current emissions	EN IEC 61000-3-2:2019+A1:2021	Section 7	N/A
Voltage fluctuations & flicker	EN 61000-3-3:2013+A1:2019+A2:2021	Section 5	N/A

IMMUNITY (EN IEC 61547:2023)				
Description of Test Item	**Standard**	**Performance Criteria**	**Observation Criteria**	**Results**
Electrostatic discharge (ESD)	IEC 61000-4-2:2008	B	A	P
Radio-frequency, Continuous radiated disturbance	IEC 61000-4-3:2020	A	A	P
Electrical fast transient (EFT)	IEC 61000-4-4:2012	B	N/A	N/A
Surge	IEC 61000-4-5:2014+A1:2017	C	N/A	N/A
Radio-frequency, Continuous conducted disturbance	IEC 61000-4-6:2013	A	N/A	N/A
Power frequency magnetic field	IEC 61000-4-8:2009	A	N/A	N/A
Voltage dips, 100% reduction	IEC 61000-4-11:2020	B	N/A	N/A
Voltage dips, 30% reduction		C	N/A	N/A

Note:
1. P is an abbreviation for Pass.
2. F is an abbreviation for Fail.
3. N/A is an abbreviation for Not Applicable.
4. Decision rules for the conclusion of this test report: decision by actual test data without considering measurement uncertainty.

2. General Information

2.1. Description of Device (EUT)

Description	:	Christmas motif LED light
Model Number	:	CX1541
Diff	:	N/A
Test Voltage	:	DC 5V From Adapter
EUT Information	:	Input : DC 5V
Highest frequency	:	Less than 15MHz
Software version	:	N/A
Hardware version	:	N/A

2.2. Accessories of Device (EUT)


Power Source	:	N/A

2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number
1.	Adapter	Shenzhen HUONIU Technology Co., Ltd.	HNFCQC3024UU	N/A

2.4. Block Diagram of connection between EUT and simulators

For Test



EUT: Christmas motif LED light

Signal Cable Description of the above Support Units

No.	Port Name	Cable	Length	Shielded (Yes or No)	Detachable (Yes or No)
(a)	N/A	N/A	N/A	N/A	N/A

2.5. Test Mode Description

For Tests		
Mode No.	Test Mode	Test Voltage
1	Lighting	DC 5V From Adapter

2.6. Test Facility

Shenzhen Alpha Product Testing Co., Ltd.

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103, Shenzhen, Guangdong, China

2.7. Measurement Uncertainty

Test Item	Uncertainty	U_{cispr}
Uncertainty for Conduction emission test	1.63dB	3.8 dB
Uncertainty for Radiation Emission test (<1G)	3.74 dB (Distance: 3m Polarize: V)	5.2 dB
	3.76 dB (Distance: 3m Polarize: H)	
Uncertainty for Radiation Emission test (>1G)	3.77 dB (Distance: 3m Polarize: V)	5.2 dB
	3.80 dB (Distance: 3m Polarize: H)	
(95% confidence levels, k=2)		

2.8. Test Equipment List

For Conducted Disturbance At Mains Terminals Test Equipment:						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESCI	101165	2023.08.16	1 Year
2.	L.I.S.N.#1	Schwarz beck	NSLK8126	8126466	2023.08.16	1 Year
3.	L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	101043	2023.08.16	1 Year
4.	Pulse Limiter	Schwarz beck	9516F	9618	2023.08.16	1 Year

For Frequency Range 30MHz~1GHz Radiated Emission Test Equipment:						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Test Receiver	Rohde &Schwarz	ESR	1316.3003K03-102082-Wa	2023.08.16	1 Year
2	Bilog Antenna	Schwarz beck	VULB 9168	9168-627	2023.08.28	2 Year

For Frequency Range 9KHz~30MHz Radiated Emission Test Equipment:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Test Receiver	Rohde & Schwarz	ESCI	101165	2023.08.16	1 Year
2	Triple-loop Antenna	EVERFINE	LLA-2	11050002	2023.08.16	1 Year

For Harmonic Current Test & Voltage Fluctuations & Flicker Test Equipment:						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	HARMINICS&FLICKER MEASUREMENT SYSTEM	EVERFINE	HFM300_V200	P630850TD1411113	2024.03.22	1 Year

For Electrostatic Discharge Test Equipment:						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	ESD Tester	TESEQ	EDS 30V	ES031000423052	2024.01.08	1 Year

For RF Field Strength Susceptibility Test Equipment:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	vector Signal Generator	Agilent	E4438C	US44271917	2023.08.16	1 Year
2.	Power meter	Agilent	E4419B	GB40202122	2023.08.16	1 Year
3.	Power Sensor	Agilent	E9300A	MY41496625s	2023.08.16	1 Year
4.	RF power Amplifier	OPHIR	5225R	1045	N/A	NCR
5.	RF power Amplifier	OPHIR	5273R	1018	N/A	NCR
6	RF power Amplifier	Micotop	MPA-3000-6000-100	MPA1811348	N/A	NCR
7.	Antenna	SCHWARZBECK	STLP9128 E-special	STLP9128E s#139	N/A	NCR
8.	Antenna	SCHWARZBECK	STLP 9149	STLP 9149 #456	N/A	NCR

For Electrical Fast Transient/Burst Immunity, Surge, Power Frequency Magnetic Field Immunity, Voltage dips and interruptions test Equipment:


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Multifunctional Compact Immunity Test system	3ctest	CCS 600	ES0801655	2023.08.16	1 Year
2.	Surge & EFT Coupling Decoupling Network	3ctest	SEPN 3832T	ES0951601	2023.08.16	1 Year
3.	Voltage variation and PF magnetic field regulating device	3ctest	VMT2216S	ES0441601	2023.08.16	1 Year
4.	Capacitive Coupling Clamp	3ctest	CCC 100	EC0441660	2023.08.16	1 Year

For Injected currents susceptibility test Equipment:						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Conducted Immunity test System	SKET	CITS_150K230M	SK2019101001_CITS	2023.08.16	1 Year
2.	Fixed Coaxial Attenuator (6dB Attenuation)	CD	ATT-0675	120540086	2023.08.16	1 Year
3.	coupling-decoupling network (CDN)	CD	CDN M2/M3	2302	2023.08.16	1 Year
4.	Electromagnetic Injection Clamp (EMC-Clamp)	CD	EM-Clamp	0513A031201	2023.08.16	1 Year

Software Information			
Test Item	Software Name	Manufacturer	Version
RE	EZ-EMC	Farad	Alpha-3A1
CE	EZ-EMC	Farad	Alpha-3A1

3. Conducted Disturbance At Mains Terminals Test

3.1. Block Diagram of Test Setup

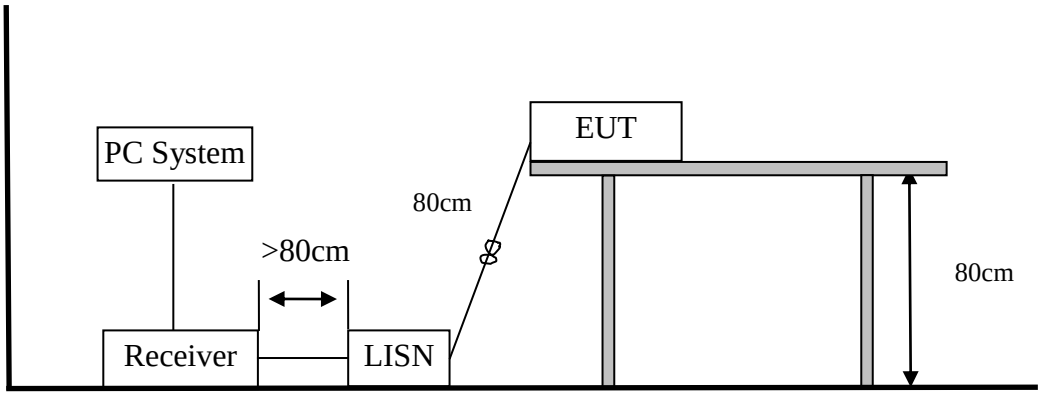

3.2. Test Standard

EN IEC 55015:2019+A11:2020

3.3. Power Line Conducted Emission Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
9kHz ~ 50kHz	110	--
50kHz ~ 150kHz	90 ~ 80*	--
150kHz ~ 0.5MHz	66 ~ 56*	56 ~ 46*
0.5MHz ~ 5.0MHz	56	46
5.0MHz ~ 30MHz	60	50

Notes: 1. Emission level=Read level + LISN factor-Preamp factor + Cable loss

2. * Decreasing linearly with logarithm of frequency.

3. The lower limit shall apply at the transition frequencies.

3.4. Configuration of EUT on Test

The following equipment are installed on conducted disturbance at mains terminals to meet the EN IEC 55015 requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

3.5. Operating Condition of EUT

（1） Setup the EUT as shown as Section 3.1.

（2） Turn on the power of all equipment.

（3） Let the EUT work in test mode and 15 minutes before taking the test.

3.6. Test Procedure

（1） The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power connected to the power mains through a line impedance stabilization network (L.I.S.N. #1). The power line was checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to EN IEC 55015 on Conducted Disturbance at Mains Terminals test.

（2） The bandwidth of test receiver (R & S ESCI) is set: 200Hz at 9kHz to 150kHz, 9kHz at 150kHz to 30MHz.

（3） The frequency range from 9kHz to 30MHz is checked. The test result are reported on Section 3.7.

3.7. Conducted Disturbance at Mains Terminals Test Results


EUT	:	Christmas motif LED light	Test Date	:	2024.4.25
M/N	:	CX1541	Temperature	:	23.5℃
Test Engineer	:	Lily Wang	Humidity	:	61%
Test Voltage	:	DC 5V From Adapter	Pressure	:	101.3KPa
Test Mode	:	Lighting			
Test Results	:	**PASS**			

Note: 1. The test results are listed in next pages.

2. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector and quasi-peak detector need not be carried out.

3. If the limits for the measurement with the average detector are met when using a receiver with a quasi-peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.

Polarization: Line

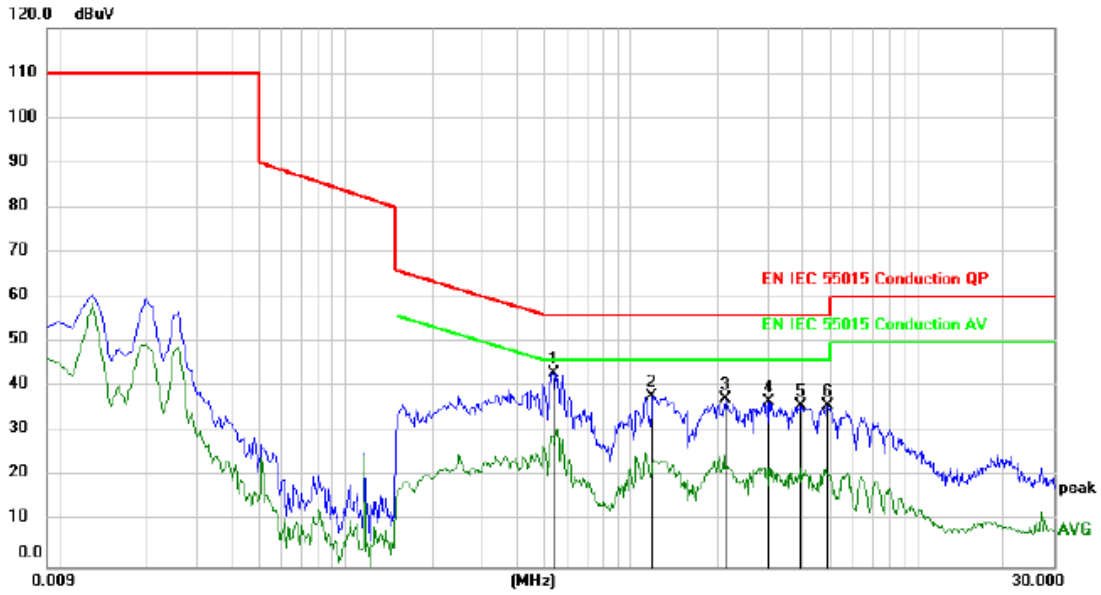


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	*	0.5325	33.16	9.95	43.11	56.00	-12.89	peak	
2		1.1805	28.02	9.89	37.91	56.00	-18.09	peak	
3		2.1405	27.38	9.88	37.26	56.00	-18.74	peak	
4		3.0005	26.84	9.95	36.79	56.00	-19.21	peak	
5		3.9405	25.86	9.96	35.82	56.00	-20.18	peak	
6		4.8405	25.89	10.02	35.91	56.00	-20.09	peak	

*:Maximum data x:Over limit !:over margin 〈Reference Only

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Polarization: Neutral

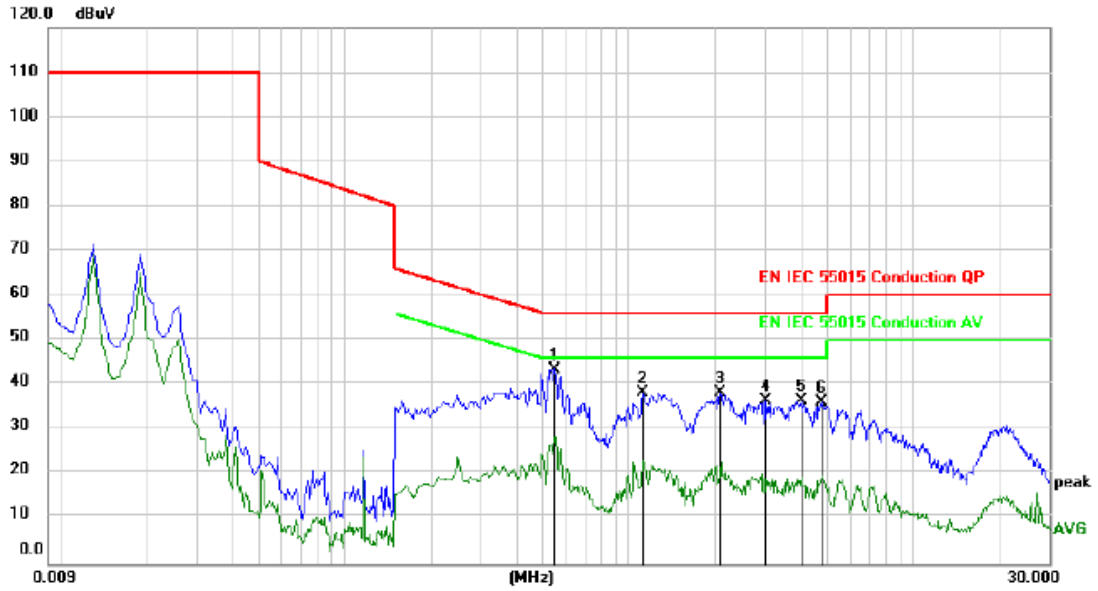


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	*	0.5460	33.56	9.94	43.50	56.00	-12.50	peak	
2		1.1205	28.37	9.90	38.27	56.00	-17.73	peak	
3		2.0805	28.31	9.88	38.19	56.00	-17.81	peak	
4		3.0005	26.41	9.95	36.36	56.00	-19.64	peak	
5		4.0405	26.34	9.97	36.31	56.00	-19.69	peak	
6		4.7805	26.23	10.02	36.25	56.00	-19.75	peak	

*:Maximum data x:Over limit !:over margin 〈Reference Only

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

4. Radiated Electromagnetic Disturbance Test

4.1. Block Diagram of Test Setup

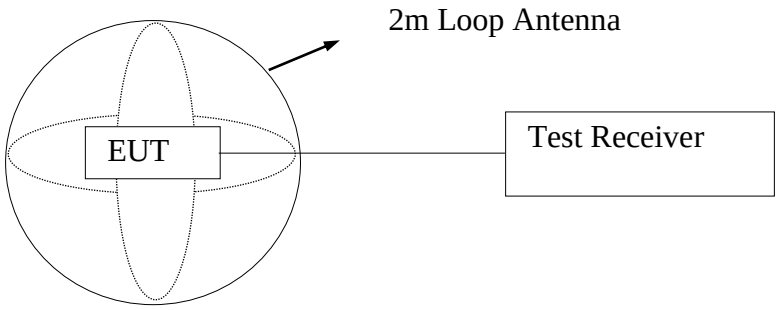

(EUT: Christmas motif LED light)

4.2. Test Standard

EN IEC 55015:2019+A11:2020

4.3. Radiated Electromagnetic Disturbance Limits

Frequency			Limits for loop diameter (dBμA)
			2m
9kHz	~	70kHz	88
70kHz	~	150kHz	88 ~ 58*
150kHz	~	3.0MHz	58 ~ 22*
3.0MHz	~	30MHz	22

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

4.4. EUT Configuration on Test

The following equipments are installed on Radiated Electromagnetic Disturbance Test to meet EN IEC 55015 requirement and operating in a manner that tends to maximize its emission characteristics in a normal application.

4.5. Operating Condition of EUT

(1) Setup the EUT and simulator as shown as Section 4.1.

(2) Turned on the power of all equipment.

(3) Let the EUT worked in test mode and 15 minutes after taking the test.

4.6. Test Procedure

The EUT was placed on a wood table in the center of a loop antenna. The induced current in the loop antenna is measured by means of a current probe and the test receiver. A three-field component was checked by means of a coaxial switch.

The frequency range from 9kHz to 30MHz was checked. The receiver was measured with the quasi-peak detector. For frequency band 9kHz to 150kHz.

The bandwidth of the field strength meter (R&S test receiver ESCI) is set at 200Hz.

For frequency band 150kHz to 30MHz, the bandwidth is set at 9kHz.The test result are reported on Section 4.7.


4.7. Radiated Electromagnetic Disturbance Test Results

EUT	:	Christmas motif LED light	Test Date	:	2024.4.25
M/N	:	CX1541	Temperature	:	23℃
Test Engineer	:	Lily Wang	Humidity	:	49%
Test Voltage	:	DC 5V From Adapter	Pressure	:	101.3KPa
Test Mode	:	Lighting			
Test Results	:	**PASS**			

Note: 1. The test results are listed in next pages.

2. If the limits for the measurement with the quasi-peak detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the quasi-peak detector need not be carried out.


Antenna polarity: X

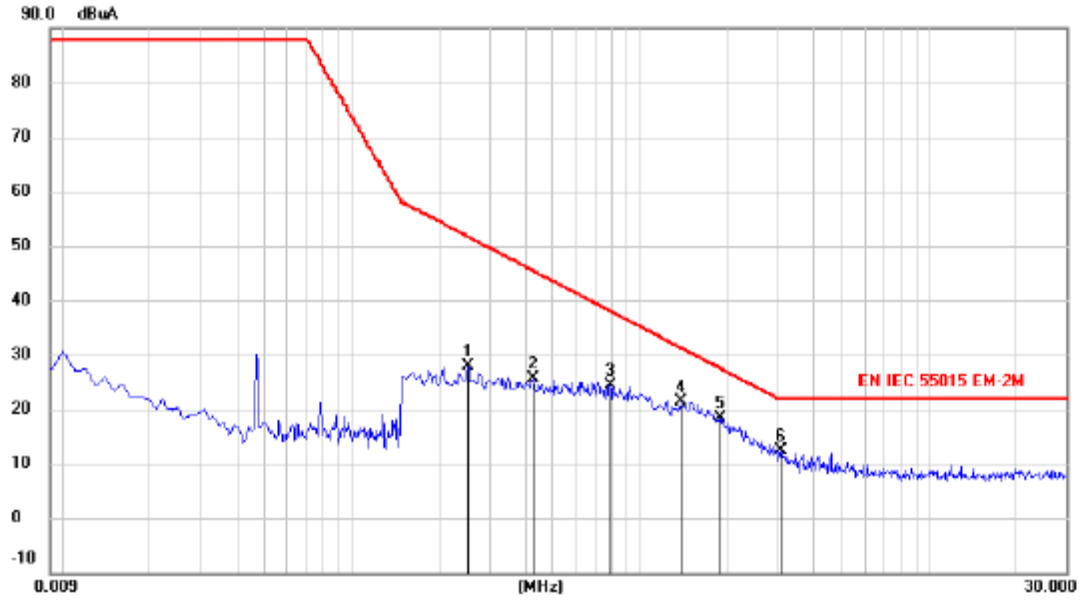

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		Antenna Height	Table Degree	
		MHz	dBuA	dB	dBuA	dBuA	dB	Detector	cm	degree	Comment
1		0.2535	27.81	0.03	27.84	51.69	-23.85	peak			
2		0.4245	25.68	0.04	25.72	45.50	-19.78	peak			
3		0.7890	24.42	0.05	24.47	38.05	-13.58	peak			
4		1.3805	21.26	0.07	21.33	31.33	-10.00	peak			
5	*	1.9005	18.30	0.08	18.38	27.49	-9.11	peak			
6		3.0805	12.31	0.10	12.41	22.00	-9.59	peak			

Note:1. *:Maximum data; x:Over limit; !:over margin.
2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Antenna polarity: Y

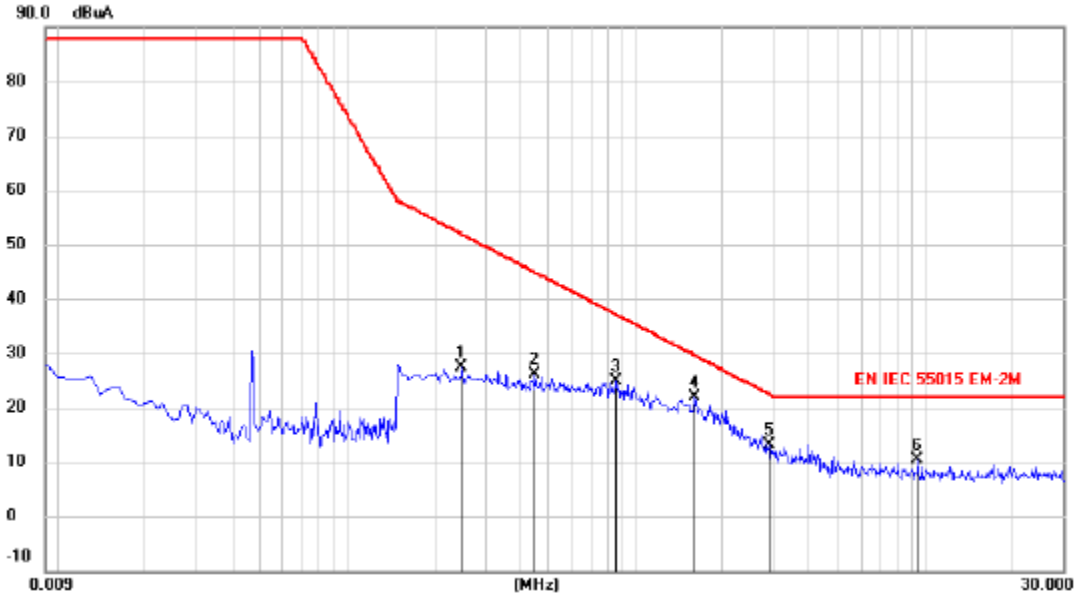

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		Antenna Height	Table Degree	
		MHz	dBuA	dB	dBuA	dBuA	dB	Detector	cm	degree	Comment
1		0.2490	27.34	0.03	27.37	51.91	-24.54	peak			
2		0.4470	26.02	0.04	26.06	44.88	-18.82	peak			
3		0.8520	24.78	0.05	24.83	37.13	-12.30	peak			
4	*	1.6005	21.69	0.07	21.76	29.55	-7.79	peak			
5		2.8804	13.03	0.10	13.13	22.49	-9.36	peak			
6		9.4405	10.17	0.19	10.36	22.00	-11.64	peak			

Note:1. *:Maximum data; x:Over limit; !:over margin.
2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Antenna polarity: Z




No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		Antenna Height	Table Degree	
		MHz	dBuA	dB	dBuA	dBuA	dB	Detector	cm	degree	Comment
1		0.1949	27.40	0.02	27.42	54.85	-27.43	peak			
2		0.4425	26.00	0.04	26.04	45.00	-18.96	peak			
3		0.6405	25.06	0.05	25.11	40.56	-15.45	peak			
4		1.5038	20.96	0.07	21.03	30.30	-9.27	peak			
5	*	2.8405	13.67	0.10	13.77	22.66	-8.89	peak			
6		10.8805	9.64	0.21	9.85	22.00	-12.15	peak			

Note:1. *:Maximum data; x:Over limit; !:over margin.
2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

5. Radiated Disturbance Test

5.1. Block Diagram of Test Setup

In Semi Anechoic Chamber (3m) Test Setup Diagram for 30MHz~1000MHz

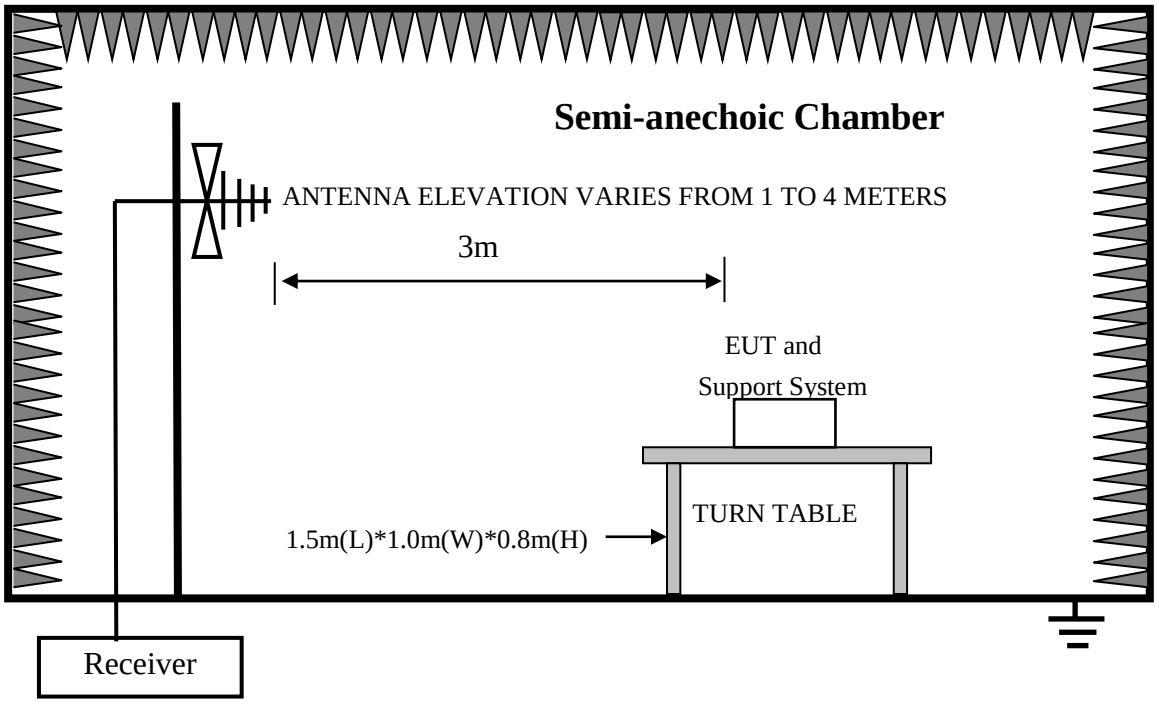

5.2. Test Standard

EN IEC 55015:2019+A11:2020

5.3. Radiated Disturbance Limit

All emanations from computing devices or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified below:

FREQUENCY (MHz)	DISTANCE (Meters)	FIELD STRENGTHS LIMITS (dBμV/m)
30 ~ 230	3	40
230 ~ 1000	3	47

Note: (1) Emission level = Read level + Antenna Factor-Preamp Factor +Cable Loss

(2) The lower limit shall apply at the transition frequencies.

(3) Distance refers to the distance in meters between the test antenna and the closed point of any part of the EUT.

5.4. Configuration of EUT on Test

The following equipment are installed on Radiated Emission Test to meet the EN IEC 55015 requirements and operating regulations in a manner that tends to maximize its emission characteristics in normal application.

5.5. Operating Condition of EUT

（1） Setup the EUT as shown as Section 5.1.

（2） Turn on the power of all equipment.

（3） Let the EUT work in test mode and 15 minutes before taking the test.

5.6. Test Procedure

The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber. An antenna was located 3m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to EN IEC 55015 on Radiated Disturbance test.


The bandwidth setting on the test receiver (R&S TEST RECEIVER ESR) is 120 kHz.

The frequency range from 30MHz to 1000MHz is checked. Test results are reported in Section 5.7.

5.7. Radiated Disturbance Test Result

For below 1G radiated disturbance test result:					
EUT	:	Christmas motif LED light	Test Date	:	2024.4.25
M/N	:	CX1541	Temperature		23℃
Test Engineer	:	Lily Wang	Humidity	:	49%
Test Voltage	:	DC 5V From Adapter	Pressure	:	101.3KPa
Test Mode	:	Lighting			
Test Results	:	**PASS**			
Note: 1. The test results are listed in next pages. 2. If the limits for the measurement with the quasi-peak detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet limits and the measurement with the quasi-peak detector need not be carried out.					

Antenna polarity: Vertical

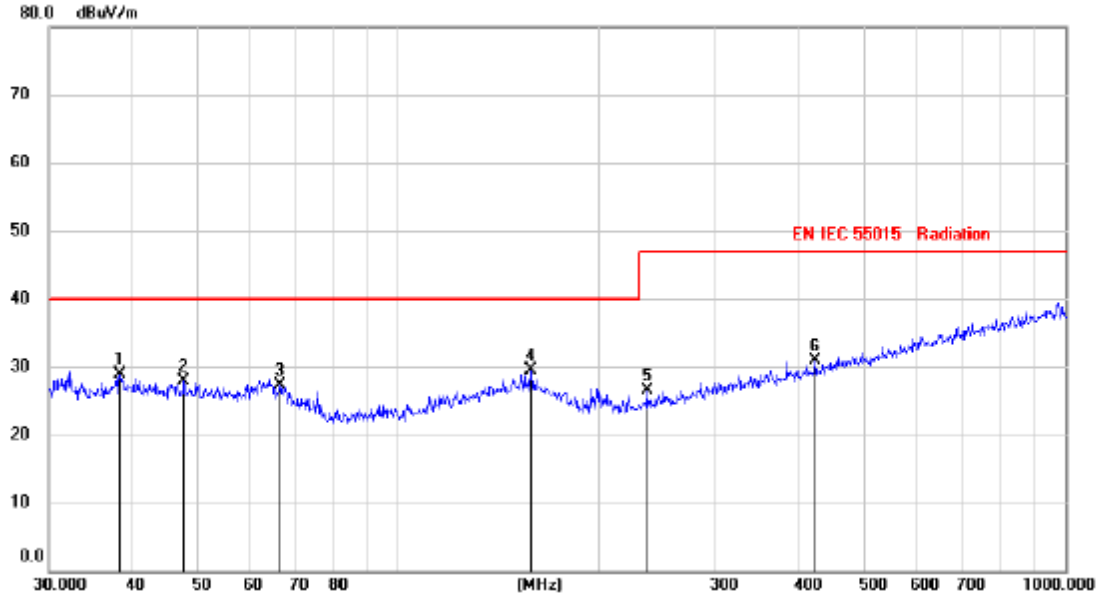

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		38.3967	14.65	14.26	28.91	40.00	-11.09	peak			
2		47.9730	13.82	14.04	27.86	40.00	-12.14	peak			
3		66.6448	15.50	11.87	27.37	40.00	-12.63	peak			
4	*	158.3897	14.59	14.99	29.58	40.00	-10.42	peak			
5		236.2302	13.98	12.44	26.42	47.00	-20.58	peak			
6		422.0577	14.09	16.79	30.88	47.00	-16.12	peak			

Note:1. *:Maximum data; x:Over limit; !:over margin.
2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Antenna polarity: Horizontal




No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	38.4135	15.99	14.27	30.26	40.00	-9.74	peak			
2		59.6755	14.04	13.25	27.29	40.00	-12.71	peak			
3		116.4380	13.23	12.56	25.79	40.00	-14.21	peak			
4		151.9963	13.65	14.99	28.64	40.00	-11.36	peak			
5		279.1660	13.41	13.54	26.95	47.00	-20.05	peak			
6		438.8477	14.46	17.24	31.70	47.00	-15.30	peak			

Note:1. *:Maximum data; x:Over limit; !:over margin.
2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

6. Harmonic Current Test

6.1. Block Diagram of Test Setup

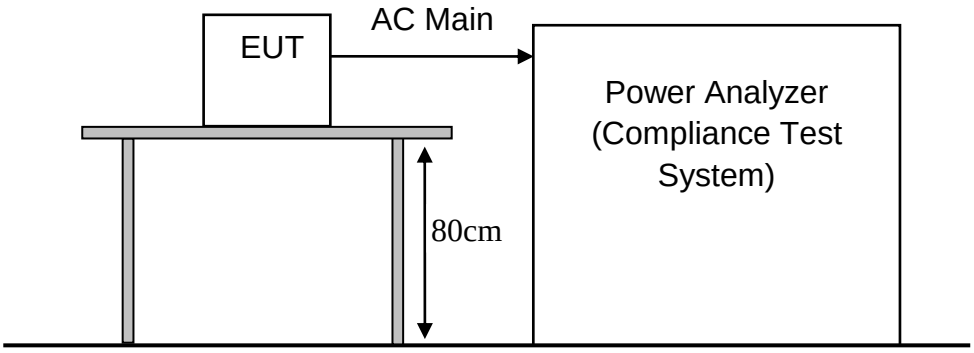

6.2. Test Standard

EN IEC 61000-3-2:2019+A1:2021, Class C

6.3. Harmonic Current Test Limits

Limits for Class C equipment	
Harmonic order **n**	**Maximum permissible harmonic current expressed as a percentage of the input current at the fundamental frequency** **%**
2	2
3	30 · λ *
5	10
7	7
9	5
11≤n≤39 (odd harmonics only)	3
* λ is the circuit power factor	

6.4. Configuration of EUT on Test

The following equipment are installed on Harmonic Current Test to meet the EN IEC 61000-3-2 requirements and operating regulations in a manner that tends to maximize its emission characteristics in normal application.

6.5. Operating Condition of EUT

（1） Setup the EUT as shown as Section 6.1.

（2） Turn on the power of all equipment.

（3） Let the EUT work in test mode and 15 minutes before taking the test.

6.6. Test Procedure

（1） The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the maximum harmonic components under normal operating conditions for each successive harmonic component in turn. The correspondent test program of test instrument to measure the current harmonics emanated from EUT is chosen. The measure time shall be not less than the necessary for the EUT to be exercised.


（2） The test results are reported on Section 6.7.

6.7. Harmonic Current Test Results

EUT	:	Christmas motif LED light	Test Date	:	N/A
M/N	:	CX1541	Temperature	:	N/A
Test Engineer	:	N/A	Humidity	:	N/A
Test Voltage	:	N/A	Pressure	:	N/A
Test Mode	:	N/A			
Test Results	:	**N/A**			
Note	:	Not applicable for equipment operated with PC, battery, or Power Supply.			

7. Voltage Fluctuations & Flicker Test

7.1. Block Diagram of Test Setup

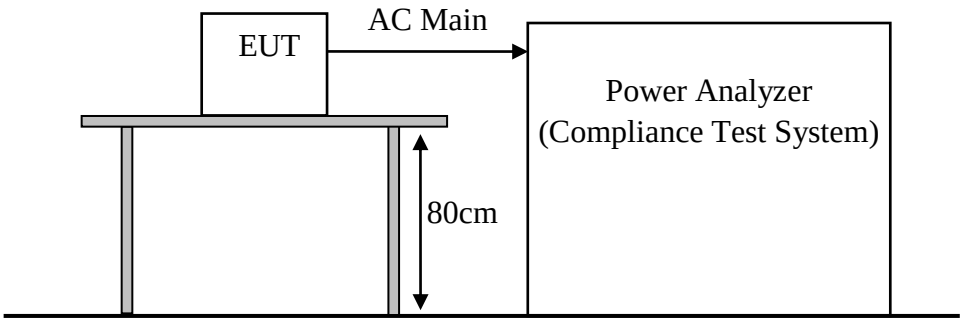

7.2. Test Standard

EN 61000-3-3:2013+A1:2019+A2:2021

7.3. Voltage Fluctuation and Flicker Test Limits

Test Item	Limit	Note
P_{st}	1.0	P_{st} means Short-term flicker indicator
P_{lt}	0.65	P_{lt} means long-term flicker indicator
T_{dt}	0.2	T_{dt} means maximum time that dt exceeds 3%
d_{max}(%)	4%	d_{max} means maximum relative voltage change.
d_c(%)	3.3%	d_c means relative steady-state voltage change.

7.4. Configuration of EUT on Test

The following equipment are installed on Harmonic Current Test to meet the EN61000-3-3 requirements and operating regulations in a manner that tends to maximize its emission characteristics in normal application.

7.5. Operating Condition of EUT

（1） Setup the EUT as shown as Section 7.1.

（2） Turn on the power of all equipment.

（3） Let the EUT work in test mode and 15 minutes before taking the test.

7.6. Test Procedure

（1） The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the most unfavorable sequence of voltage changes under normal conditions During the flick measurement; the measure time shall include that part of whole operation changes. The observation period for short-term flicker indicator is 10 minutes and the observation period for long-term flicker indicator is 2 hours.

（2） The test results are reported on Section 7.7.

7.7. Voltage Fluctuation and Flicker Test Results

EUT	:	Christmas motif LED light	Test Date	:	N/A
M/N	:	CX1541	Temperature	:	N/A
Test Engineer	:	N/A	Humidity	:	N/A
Test Voltage	:	N/A	Pressure	:	N/A
Test Mode	:	N/A			
Test Results	:	N/A			
Note	:	1.Not applicable for equipment operated with PC, battery, or Power Supply.			

8. Immunity Performance Criteria

Performance Level

The test results shall be classified in terms of the loss of function or degradation of performance of the equipment under test, relative to a performance level by its manufacturer or the requestor of the test, or the agreed between the manufacturer and the purchaser of the product.

Definition related to the performance level:

1. Based on the used product standard
2. Based on the declaration of the manufacturer, requestor or purchaser

Criterion A:

Definition: normal performance within limits specified by the manufacturer, requestor and purchaser.

During the test no change of the luminous intensity shall be observed and the regulating control, if any shall operate during the test as intended.

Criterion B:

Definition: temporary loss of function or degradation of performance which ceases after the disturbance ceases, and from which the equipment under test recovers its normal performance, without operator intervention.

During the test the luminous intensity June change to any value. After the test the luminous intensity shall be restored to its initial value within 1 min. Regulating controls need not function during the test, but after the test the mode of the control shall be the same as before the test provided that during the test no mode changing commands were given.

Criterion C:

Definition: temporary loss of function or degradation of performance, the correction of which requires operator intervention.


During and after the test any change of the luminous intensity is allowed and the lamps June be extinguished. After the test, within 30 min, all functions shall return to normal if necessary by temporary interruption of the mains supply and/or operating the regulating control. Additional requirement for Lighting equipment incorporating a starting device: after the test the Lighting equipment is switched off. After half an hour it is switched on again. The Lighting equipment shall start and operate as intended.

Criterion D:

Definition: loss of function or degradation of performance, which is not recoverable, owing to damage to hardware or software, or loss of data.

9. Electrostatic Discharge Test

9.1. Block Diagram of Test Setup

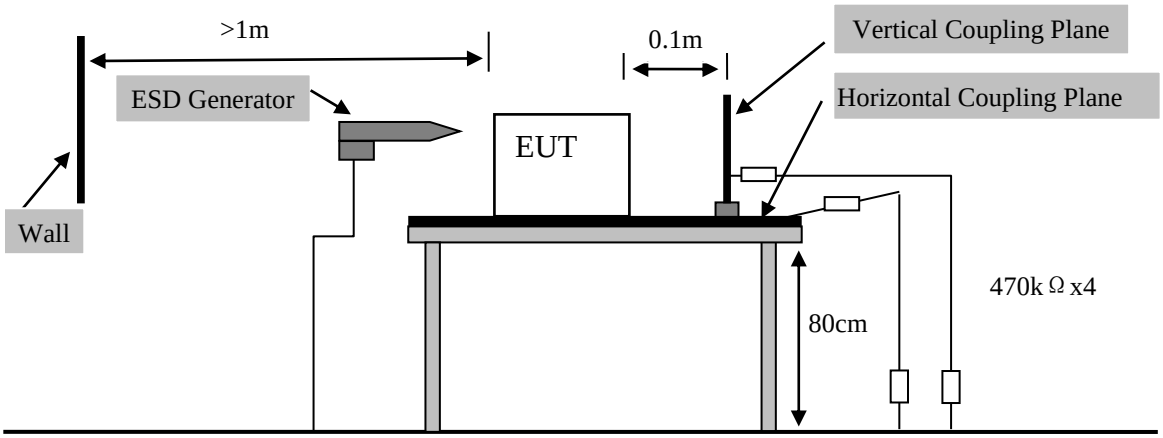

9.2. Test Standard

EN IEC 61547:2023 (IEC 61000-4-2:2008)

9.3. Electrostatic Discharge Test Limits

Test Type	Test Level	Performance Criterion
Air Discharge	8KV	B
Contact Discharge	4KV	B

Notes:
1. A performance criterion C could be applied to toys mot using score or data entered by the user. Examples are musical soft toys, sounding toys, etc.
2. Test set-up reference IEC 61000-4-2:2008

9.4. Configuration of EUT on Test

The following equipment are installed on Electrostatic Discharge Test to meet the IEC 61000-4-2 requirements and operating regulations in a manner that tends to maximize its emission characteristics in normal application.

9.5. Operating Condition of EUT

（1） Setup the EUT as shown as Section 9.1.

（2） Turn on the power of all equipment.

（3） Let the EUT work in test mode and 15 minutes before taking the test.

9.6. Test Procedure

（1） Air Discharge**:**

The test was applied on non-conductive surfaces of EUT. The round discharge tip of the discharge electrode was approached as fast as possible to touch the EUT. After each discharge, the discharge electrode was removed from the EUT. The generator was re-triggered for a new single discharge and repeated 20 times for each pre-selected test point. This procedure was repeated until all the air discharge completed

（2） Contact Discharge:

All the procedure was same as Section 9.7.1. except that the generator was re-triggered for a new single discharge for each pre-selected test point. The tip of the discharge electrode was touching the EUT before the discharge switch was operated.

（3） Indirect discharge for horizontal coupling plane:

At least 20 single discharges were applied to the horizontal coupling plane, at points on each side of the EUT. The discharge electrode positions vertically at a distance of 0.1m from the EUT and with the discharge electrode touching the coupling plane.

（4） Indirect discharge for vertical coupling plane:

At least 20 single discharge were applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, was placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges were applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

9.7. Electrostatic Discharge Test Results

EUT	:	Christmas motif LED light	Test Date	:	2024.4.25
M/N	:	CX1541	Temperature	:	23.5℃
Test Engineer	:	Lily Wang	Humidity	:	49%
Test Voltage		DC 5V From Adapter	Pressure		101.3KPa
Test Mode	:	Lighting			
Test Results	:	**PASS**			

Discharge Voltage (kV)	Type Of Discharge	Dischargeable Points	Performance	
			Required	Observation
±4	Contact	N/A	B	N/A
±8	Air	1, 2	B	A
±4	HCP-Bottom	Edge of the HCP	B	A
±4	VCP-Front	Center of the VCP	B	A
±4	VCP-Left	Center of the VCP	B	A
±4	VCP-Back	Center of the VCP	B	A
±4	VCP-Right	Center of the VCP	B	A

Discharge Points Description

1	Gap	4	N/A
2	Line	5	N/A
3	N/A	6	N/A

Note: 1. For the time interval between successive single discharges an initial value of one second.


2. For Discharge each Point Positive 10 times and negative 10 times discharge.

3. Class A is no function loss.

4. EUT does not contain metal contact points, not need to contact discharge measurement.

10. RF Field Strength Susceptibility Test

10.1.Block Diagram of Test Setup

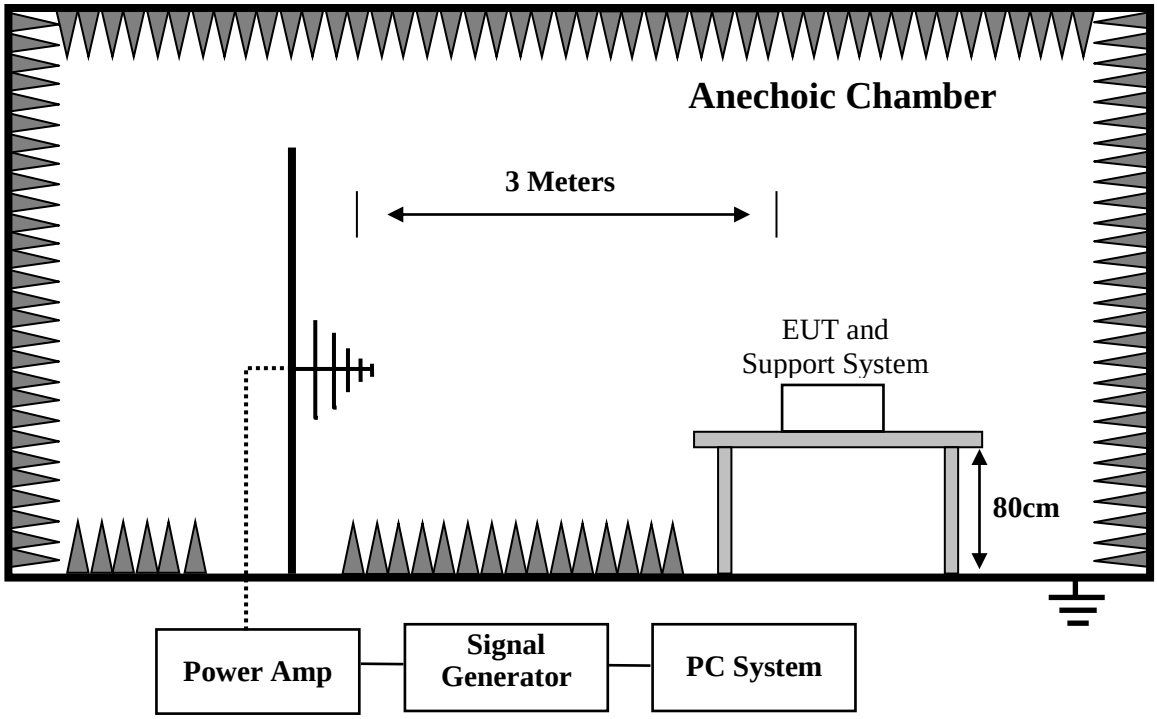

10.2.Test Standard

EN IEC 61547:2023 (IEC 61000-4-3:2020)

10.3.RF Field Strength susceptibility Test Limits

Test Specifications	Test Level	Performance Criterion
80MHz-1000MHz	3V/m (r.m.s.)	A

Notes: 1. Test set-up reference IEC 61000-4-3:2020.

10.4.Configuration of EUT on Test

The following equipment are installed on Electrostatic Discharge Test to meet the IEC 61000-4-3 requirements and operating regulations in a manner that tends to maximize its emission characteristics in normal application.

10.5.Operating Condition of EUT

（1） Setup the EUT as shown as Section 10.1.

（2） Turn on the power of all equipment.

（3） Let the EUT work in test mode and 15 minutes before taking the test.

10.6.Test Procedure

（1） Testing was performed in a Fully anechoic chamber as recommended by IEC 61000-4-3.

（2） The EUT was placed on an 80 cm high non-conductive table located in the area of field uniformity. The radiating antenna was placed 3m in front of the EUT and Support system, and dwell time of the radiated interference was controlled by an automated, computer-controlled system.

（3） The signal source was stepped through the applicable frequency range at a rate no faster than 1% of the fundamental. The signal was amplitude modulated 80% over the frequency range 80 MHz to 1GHz at a level of 3 V/m. The dwell time was set at 3 s. Field presence was monitored during testing via a field probe placed in close proximity to the EUT.

（4） Throughout testing, the EUT was closely monitored for signs of susceptibility. The test was performed with the antennae oriented in both a horizontal and vertical polarization.

（5） All the scanning conditions are as follows:

Condition of Test	Require of Test
Test Fielded Strength	3 V/m
Radiated Signal	80% amplitude modulated with a 1kHz sine wave
Scanning Frequency	80 - 1000 MHz
Sweeping time of radiated	0.0015 decade/s
Dwell Time	1 Sec.

10.7.RF Field Strength Susceptibility Test Results


EUT	:	Christmas motif LED light	Test Date	:	2024.4.25
M/N	:	CX1541	Temperature	:	23.9℃
Test Engineer	:	Lily Wang	Humidity	:	51%
Test Voltage		DC 5V From Adapter	Pressure		101.3KPa
Test Mode	:	Lighting			
Test Results	:	**PASS**			
Modulation:		☑ AM ☐ Pulse ☐ none 1 kHz 80%			

	Frequency Range :80 MHz -1000MHz				
Steps	1%				
	Horizontal		Vertical		Result
	Required	Observation	Required	Observation	(Pass / Fail)
Front	A	A	A	A	Pass
Right	A	A	A	A	Pass
Rear	A	A	A	A	Pass
Left	A	A	A	A	Pass

Note: 1. Class A is no function loss.

11. Electrical Fast Transient/Burst Immunity Test

11.1.Block Diagram of Test Setup

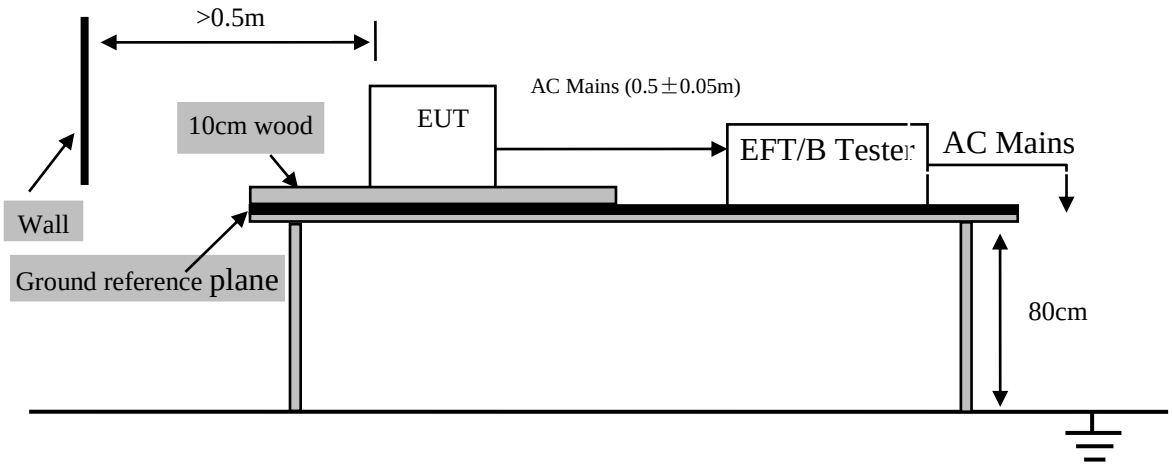

11.2.Test Standard

EN IEC 61547:2023(IEC 61000-4-4: 2012) (Severity Level 2 at 1kV)

11.3.Electrical Fast Transient/Burst Test Limits

Level	On Power Supply Lines	On I/O (Input/Output) Signal data and control lines
1	0.5 kV	0.25 kV
2	1 kV	0.5 kV
3	2 kV	1 kV
4	4 kV	2 kV
X	Special	Special

Notes:
1. Test set-up reference IEC 61000-4-4:2012
2. Performance criterion : **B**

11.4.Configuration of EUT on Test

The following equipment are installed on Electrostatic Discharge Test to meet the IEC 61000-4-4 requirements and operating regulations in a manner that tends to maximize its emission characteristics in normal application.

11.5.Operating Condition of EUT

(1) Setup the EUT as shown as Section 11.1.
(2) Turn on the power of all equipment.
(3) Let the EUT work in test mode and 15 minutes before taking the test.

11.6.Test Procedure

(1) The EUT and its simulators were placed on the ground reference plane and were insulated from it

by a wood support 0.1m + 0.01m thick. The ground reference plane was 1m*1m metallic sheet with 0.65mm minimum thickness. This reference ground plane was project beyond the EUT by at least 0.1m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane was more than 0.5m. All cables to the EUT was placed on the wood support, cables not subject to EFT/B was routed as far as possible from the cable under test to minimize the coupling between the cables.

11.6.1. For input and AC power ports:

The EUT was connected to the power mains by using a coupling device that couples the EFT interference signal to AC power lines. Both positive Fast transients and negative Fast transients of test voltage were applied during compliance test. Fast transients are carried out with a minimum duration of 2 min with a positive polarity and a minimum of 2 min with a negative polarity.

11.6.2. For signal lines and control lines ports(Only applicable to ports interfacing with cables whose total length, according to the manufacturer's specification, June exceed 3 m.):

It’s not to be tested.

11.6.3. For DC input and DC output power ports(Not applicable to equipment not connected to the mains while in use.):


It’s not to be tested.

11.7.Electrical Fast Transient/Burst immunity Test Results

EUT	:	Christmas motif LED light	Test Date	:	N/A
M/N	:	CX1541	Temperature	:	N/A
Test Engineer	:	N/A	Humidity	:	N/A
Test Voltage	:	N/A	Pressure	:	N/A
Test Mode	:	N/A			
Test Results	:	N/A			
Note		Not applicable for equipment operated with PC, battery, or Power Supply.			

12. Surge Test

12.1.Block Diagram of Test Setup

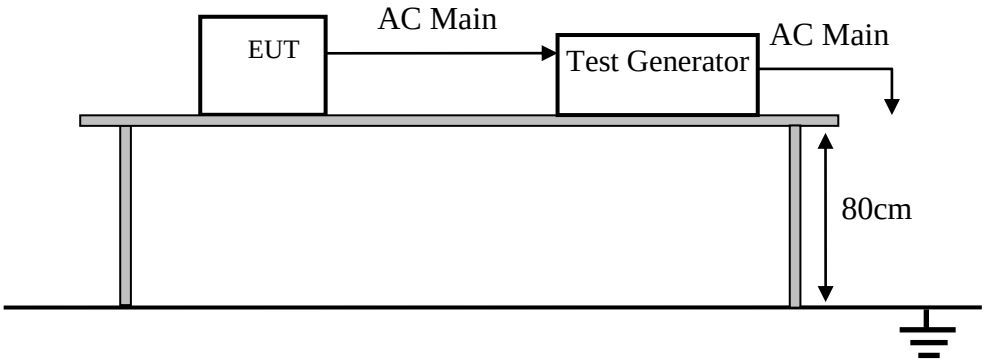

12.2.Surge Test Limits

Characteristics		Test levels		
		Device		
		Self-ballasted lamps and semi-luminaires	Luminaires and independent auxiliaries	
			Input power	
			≤25 W	>25 W
Wave-shape data		1,2/50 µs	1,2/50 µs	1,2/50 µs
Test levels	line to line	±0,5 kV	±0,5 kV	±1,0 kV
	line to ground	±1,0 kV	±1,0 kV	±2,0 kV
NOTE In addition to the specified test level, all lower test levels as detailed in IEC 61000-4-5 should also be satisfied.				

Severity level

Severity Level	Open-Circuit Test Voltage kV
1	0.5
2	1.0
3	2.0
4	4.0
*	Special

Performance criterion : C

12.3.Configuration of EUT on Test

The following equipment are installed on Electrostatic Discharge Test to meet the IEC 61000-4-5:2014+A1:2017 requirements and operating regulations in a manner that tends to maximize its emission characteristics in normal application.

12.4.Operating Condition of EUT

(1) Setup the EUT as shown as Section 12.1.

(2) Turn on the power of all equipment.

(3) Let the EUT work in test mode and 15 minutes before taking the test.

12.5.Test Procedure

(1) For line to line coupling mode, provide a 1.0kV 1.2/50us voltage surge (at open-circuit condition) and 8/20us current surge to EUT selected points.

(2) These tests are carried out according to IEC 61000-4-5, with test levels as shown as Section 12.2. Lower levels need not to be tested. Pulses shall be applied to the a.c. voltage wave as follows; five positive polarity pulses at the 90º phase angle, five negative polarity pulses at the 270º phase angle.

(3) Different phase angles are done individually.


(4) Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.

12.6.Surge Test Results

EUT	:	Christmas motif LED light	Test Date	:	N/A
M/N	:	CX1541	Temperature	:	N/A
Test Engineer	:	N/A	Humidity	:	N/A
Test Voltage	:	N/A	Pressure	:	N/A
Test Mode	:	N/A			
Test Results	:	N/A			
Note	:	Not applicable for equipment operated with PC, battery, or Power Supply.			

13. Injected Currents Susceptibility Test

13.1.Block Diagram of Test Setup

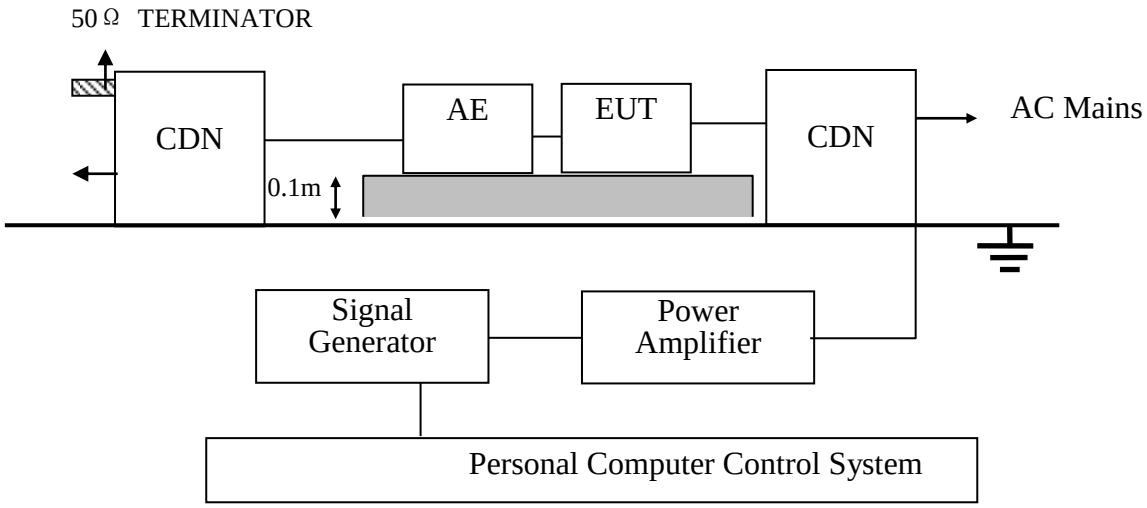

13.2.Test Standard

EN IEC 61547:2023 (IEC 61000-4-6: 2013)
(Severity Level 2 at 3Vrms and frequency is from 0.15MHz to 80MHz)

13.3.Injected currents susceptibility Test Limits

Level	Voltage Level (e.m.f.) V
1	1
2	3
3	10
X	Special
Notes: 1. Test set-up reference IEC 61000-4-6:2013	

Test Specifications	Test Level	Performance Criterion
0.15MHz-80MHz	3V (r.m.s.)	A

13.4.Configuration of EUT on Test

The following equipment are installed on Electrostatic Discharge Test to meet the IEC 61000-4-6 requirements and operating regulations in a manner that tends to maximize its emission characteristics in normal application.

13.5.Operating Condition of EUT

(1) Setup the EUT as shown as Section 13.1.

(2) Turn on the power of all equipment.

(3) Let the EUT work in test mode and 15 minutes before taking the test.

13.6.Test Procedure

(1) Let the EUT work in test mode and test it.

(2) The EUT are placed on an insulating support 0.1m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible).

(3) The disturbance signal described below is injected to EUT through CDN.

(4) The EUT operates within its operational mode(s) under intended climatic conditions after power on.

(5) The frequency range is swept from 0.150MHz to 80MHz using 3V signal level, and with the disturbance signal 80% amplitude modulated with a 1kHz sine wave.

(6) The rate of sweep shall not exceed 1.5*10-3decades/s. Where the frequency is swept incrementally, the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.


(7) Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.

13.7.Injected currents susceptibility Test Results

EUT	:	Christmas motif LED light	Test Date	:	N/A
M/N	:	CX1541	Temperature	:	N/A
Test Engineer	:	N/A	Humidity	:	N/A
Test Voltage	:	N/A	Pressure	:	N/A
Test Mode	:	N/A			
Test Results	:	N/A			
Note	:	Not applicable for equipment operated with PC, battery, or Power Supply.			

14. Magnetic Field Immunity Test

14.1.Block Diagram of Test Setup

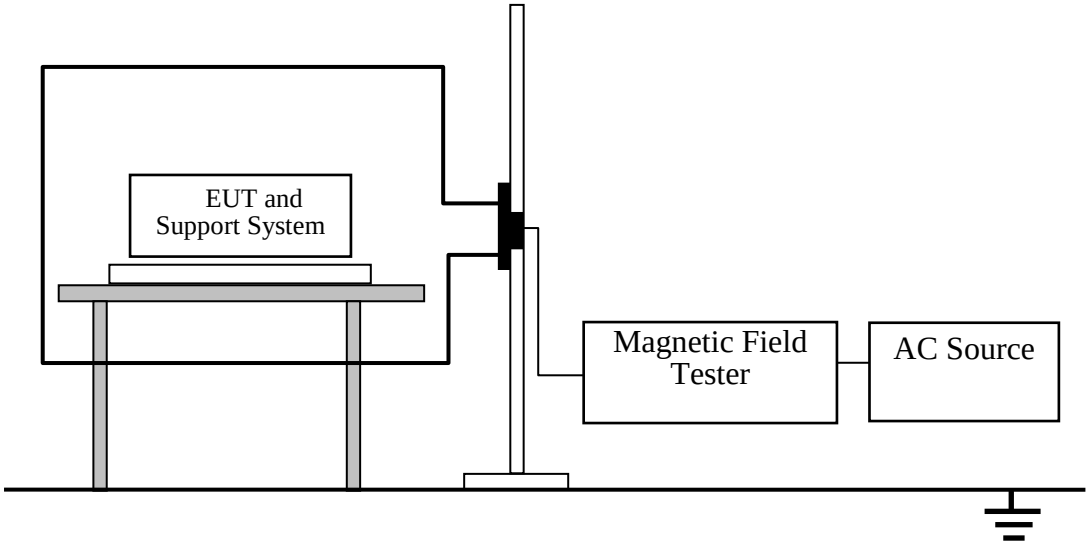

14.2.Test Standard

EN IEC 61547:2023(IEC 61000-4-8:2009)

14.3.magnetic field Test Limits

Level	Magnetic Field Strength A/m
1	1
2	3
3	10
4	30
5	100
X	Special

Notes: 1. Test set-up reference IEC 61000-4-8:2009

14.4.Configuration of EUT on Test

The following equipment are installed on Electrostatic Discharge Test to meet the IEC 61000-4-6 requirements and operating regulations in a manner that tends to maximize its emission characteristics in normal application.

14.5.Operating Condition of EUT

(1) Setup the EUT as shown as Section 14.1.

(2) Turn on the power of all equipment.

(3) Let the EUT work in test mode and 15 minutes before taking the test.

14.6.Test Procedure

(1) The EUT was subjected to the test magnetic field by using the induction coil of standard dimensions (1m*1m) and shown in Section 14.2. The induction coil was then rotated by 90°in order to expose the EUT to the test field with different orientations.


(2) These tests are carried out according to IEC 61000-4-8, with test levels as Section 14.2 and need only to be applied to equipment containing components susceptible to magnetic fields, such as Hall elements or magnetic field sensors.

14.7.Magnetic field immunity Test Results

EUT	:	Christmas motif LED light	Test Date	:	N/A
M/N	:	CX1541	Temperature	:	N/A
Test Engineer	:	N/A	Humidity	:	N/A
Test Voltage	:	N/A	Pressure	:	N/A
Test Mode	:	N/A			
Test Results	:	N/A			
Note:	The EUT not containing devices susceptible to magnetic fields, and Power-frequency magnetic field test applicable only to EUT containing devices susceptible to magnetic fields, so the test not applicable.				

15. Voltage Dips And Interruptions Test

15.1.Block Diagram of Test Setup

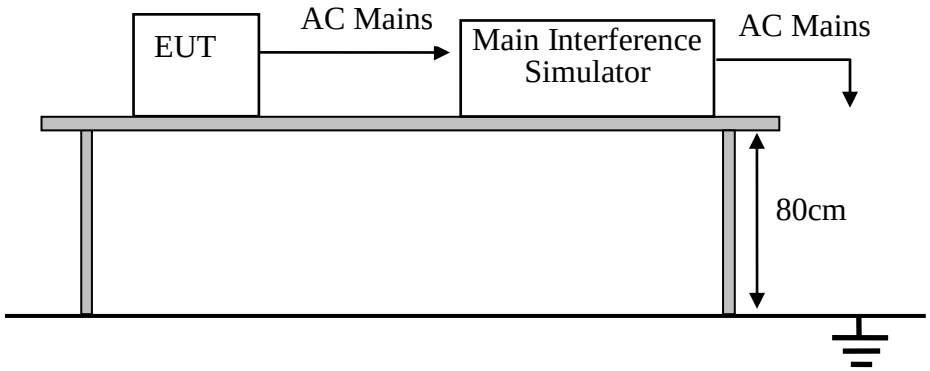

15.2.Test Standard

EN IEC 61547:2023 (IEC 61000-4-11: 2004)

15.3.Voltage dips and interruptions Test Limits

Test Level %UT	Voltage dip and short interruptions %UT	Performance Criterion	Duration (in period)
0	100	B	0.5
70	30	C	10

Notes:
1. Test set-up reference IEC 61000-4-11:2004+A1:2017
2. Performance criterion: **B&C**

15.4.Configuration of EUT on Test

The following equipment are installed on Electrostatic Discharge Test to meet the IEC 61000-4-11 requirements and operating regulations in a manner that tends to maximize its emission characteristics in normal application.

15.5.Operating Condition of EUT

(1) Setup the EUT as shown as Section 15.2.

(2) Turn on the power of all equipment.

(3) Let the EUT work in test mode and 15 minutes before taking the test.

15.6.Test Procedure

(1) The interruption is introduced at selected phase angles with specified duration.

(2) Record any degradation of performance.

15.7.Voltage dips and interruptions Test Results


EUT	:	Christmas motif LED light	Test Date	:	N/A
M/N	:	CX1541	Temperature	:	N/A
Test Engineer	:	N/A	Humidity	:	N/A
Test Voltage	:	N/A	Pressure	:	N/A
Test Mode	:	N/A			
Test Results	:	N/A			
Note:		Not applicable for equipment operated with PC, battery, or Power Supply.			

16. PHOTOGRAPH


16.1.Photos of Radiated Disturbance Test (InSemi Anechoic Chamber)




16.2.Photos of Radiated Electromagnetic Disturbance Test

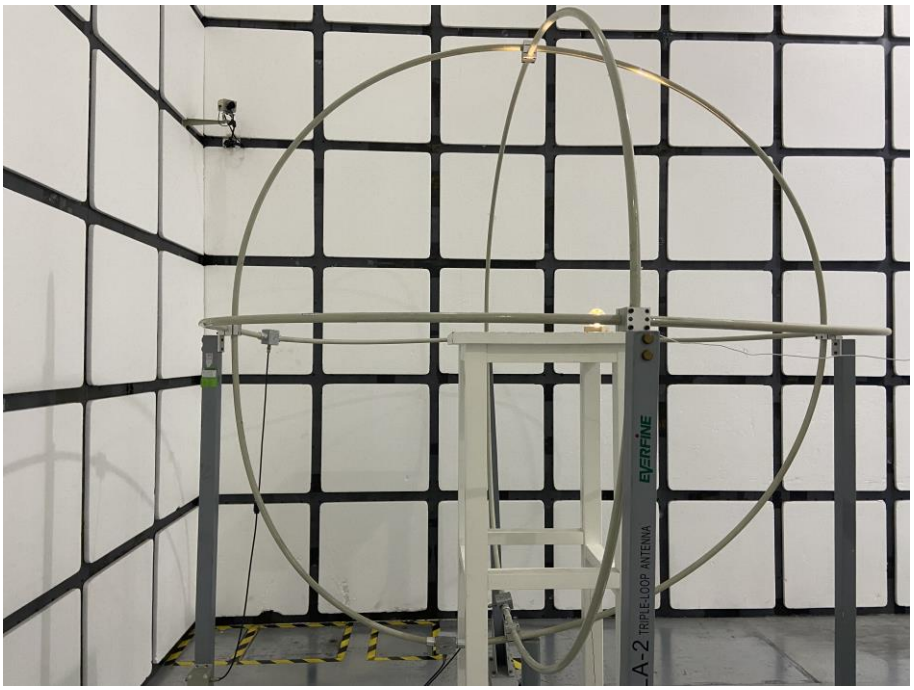


16.3.Photos Of Power Line Conducted Emission Test

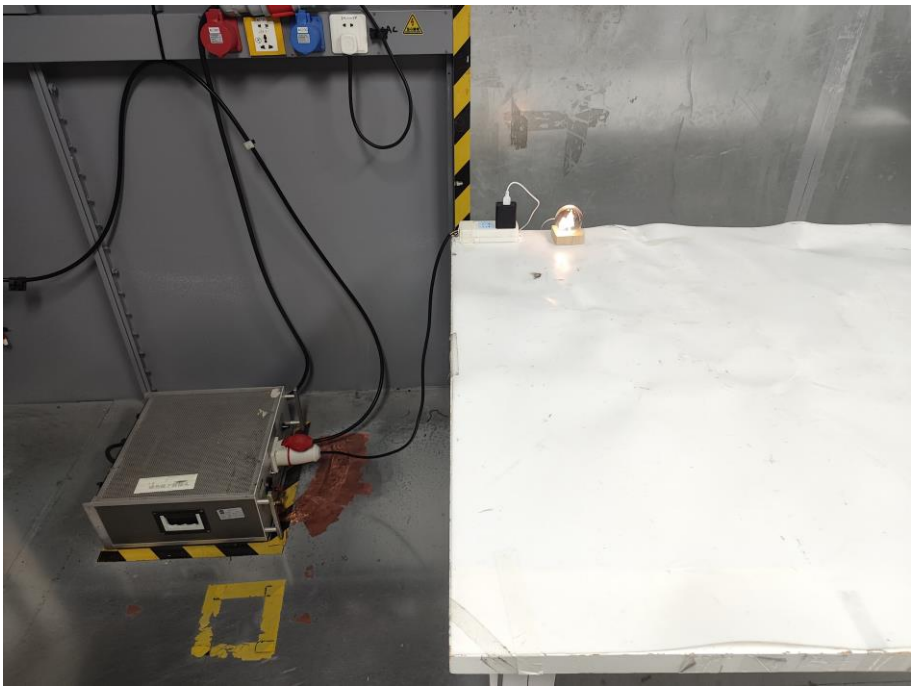


16.4.Photos of Electrostatic Discharge Test

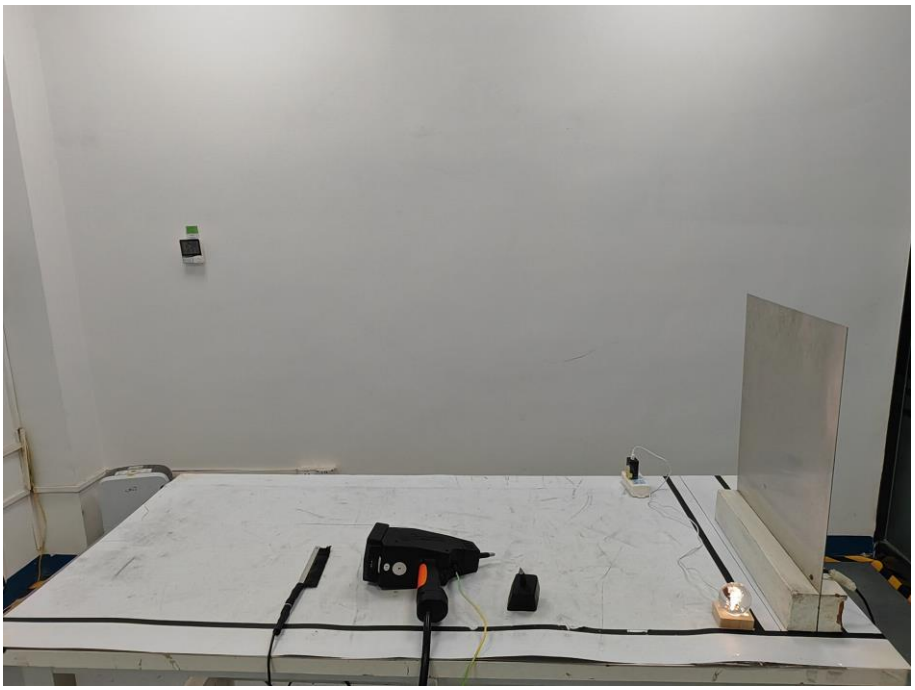


16.5.Photos of RF Field Strength Susceptibility Test

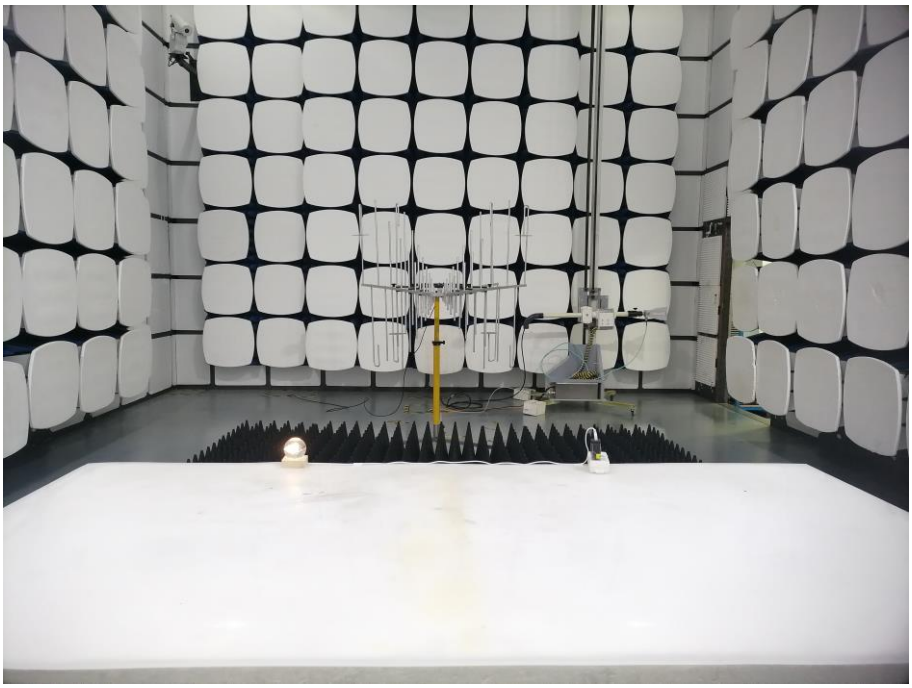


17. PHOTOS OF THE EUT

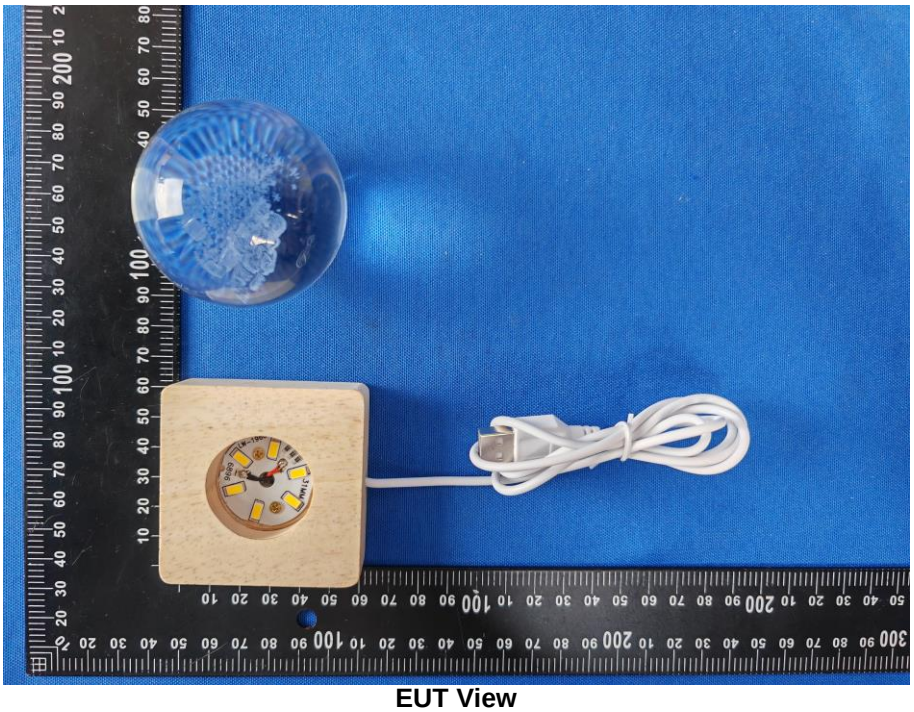


EUT View

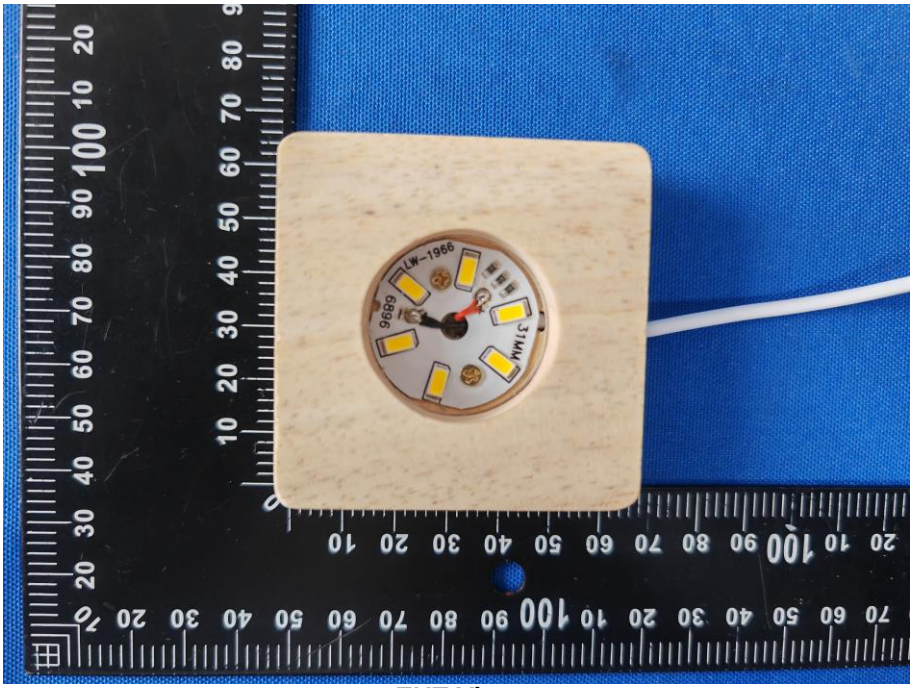


EUT View

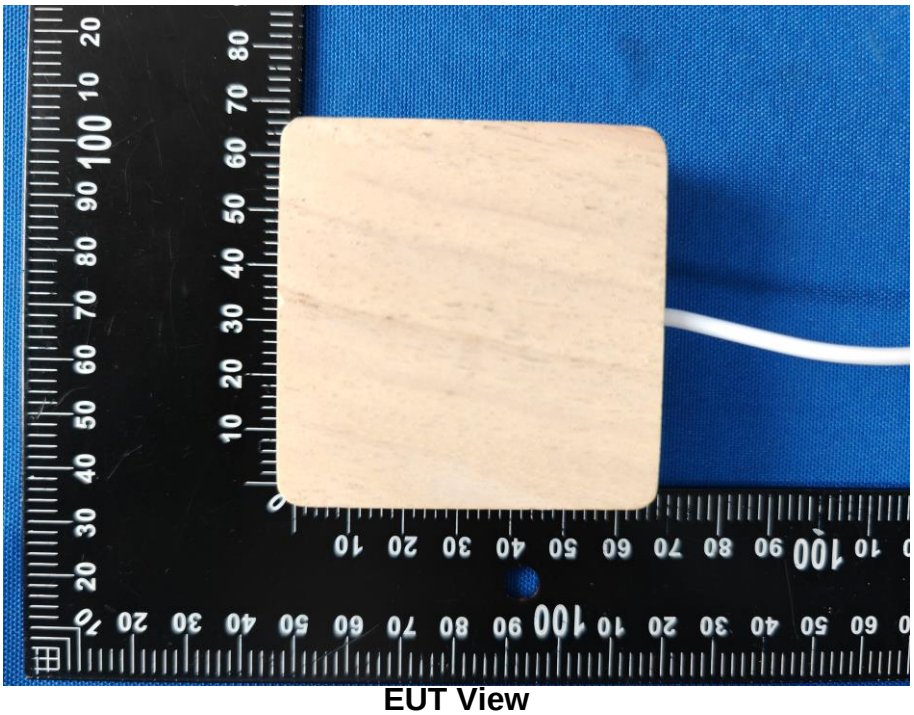


EUT View

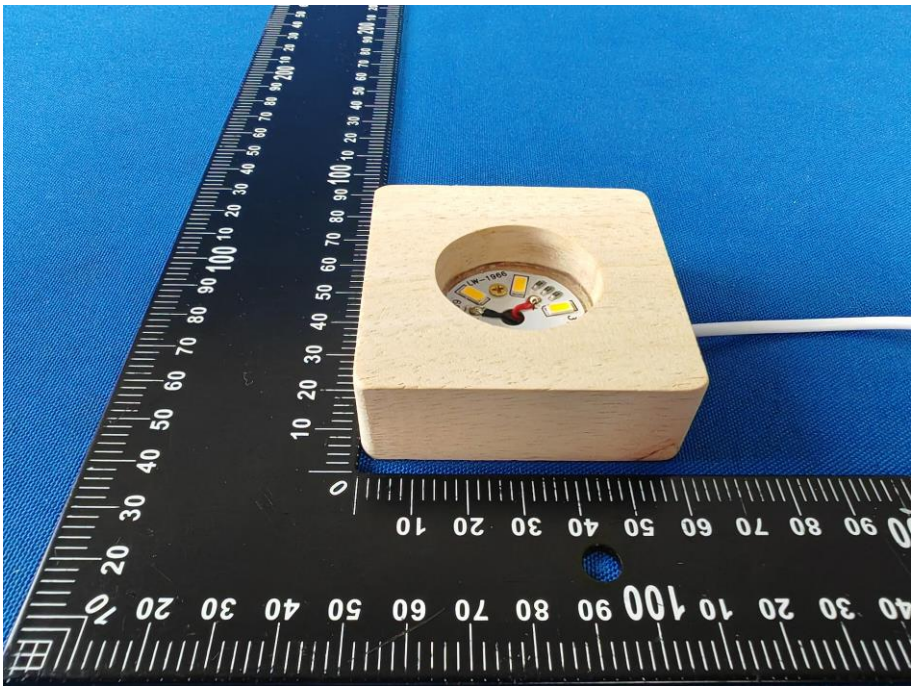


EUT View

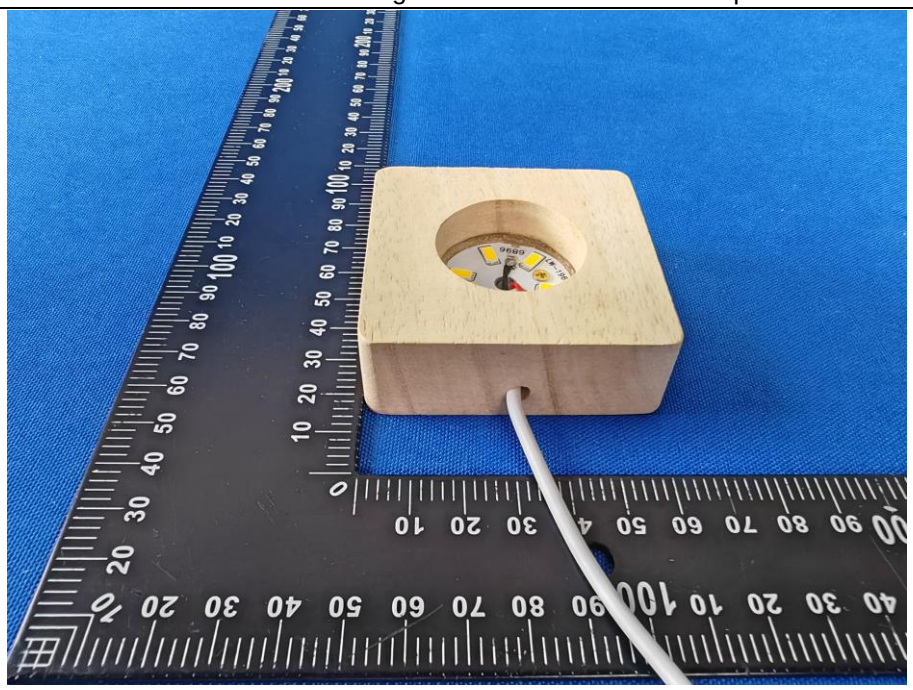


EUT View

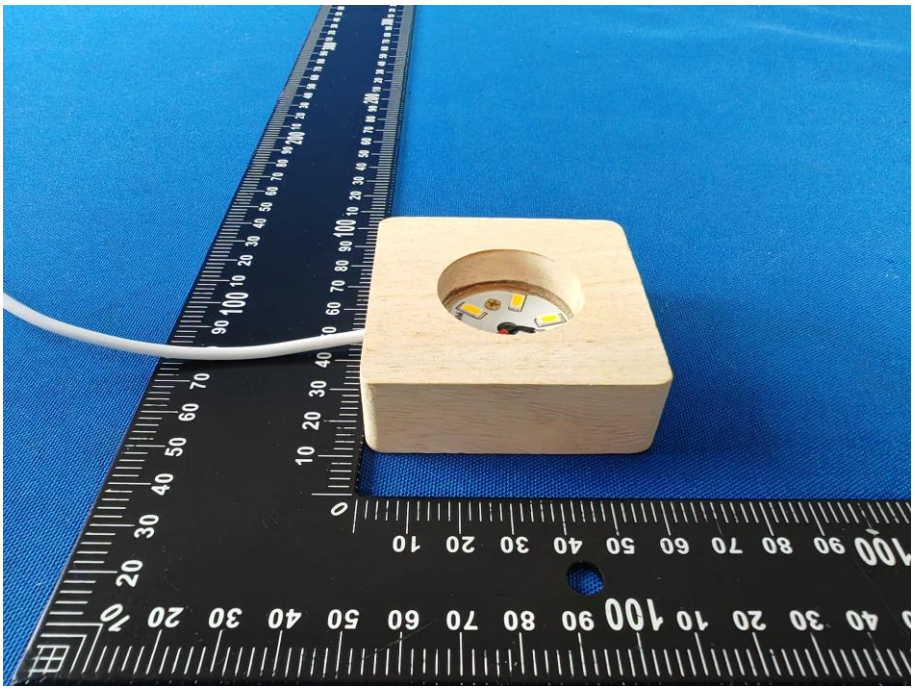


EUT View

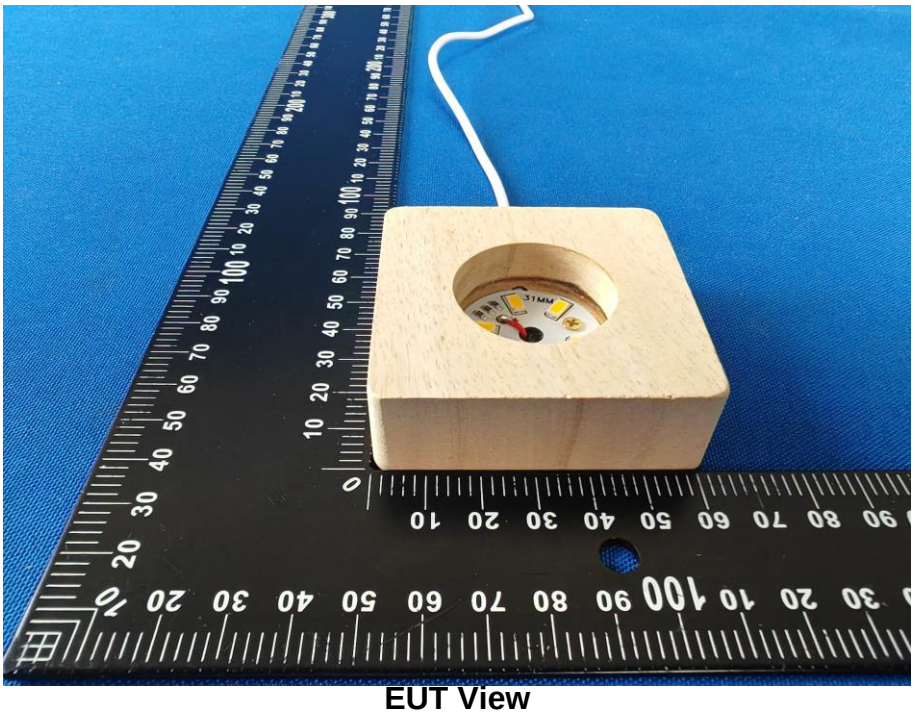


EUT View

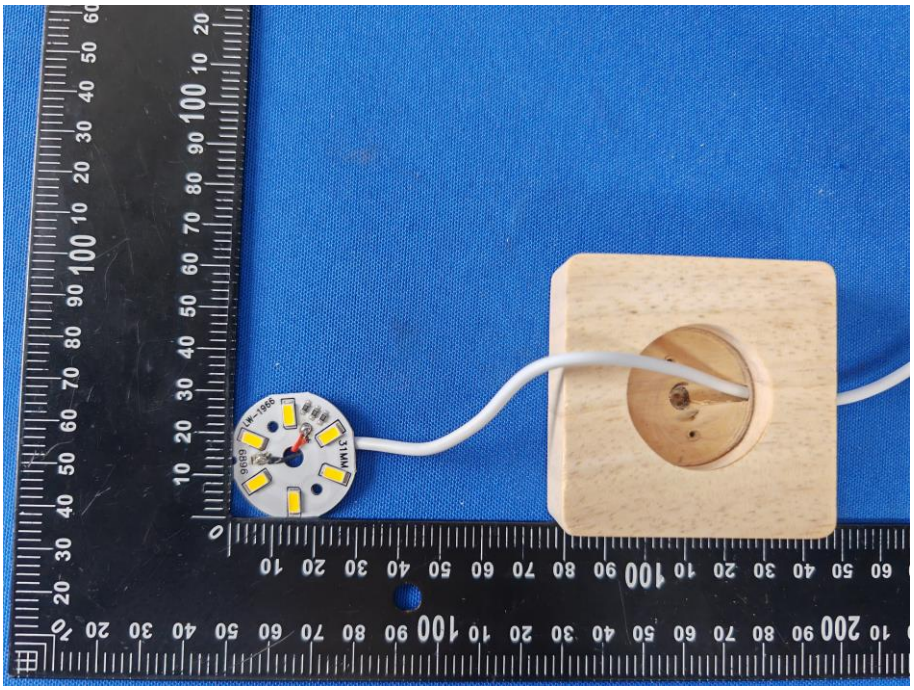

EUT View

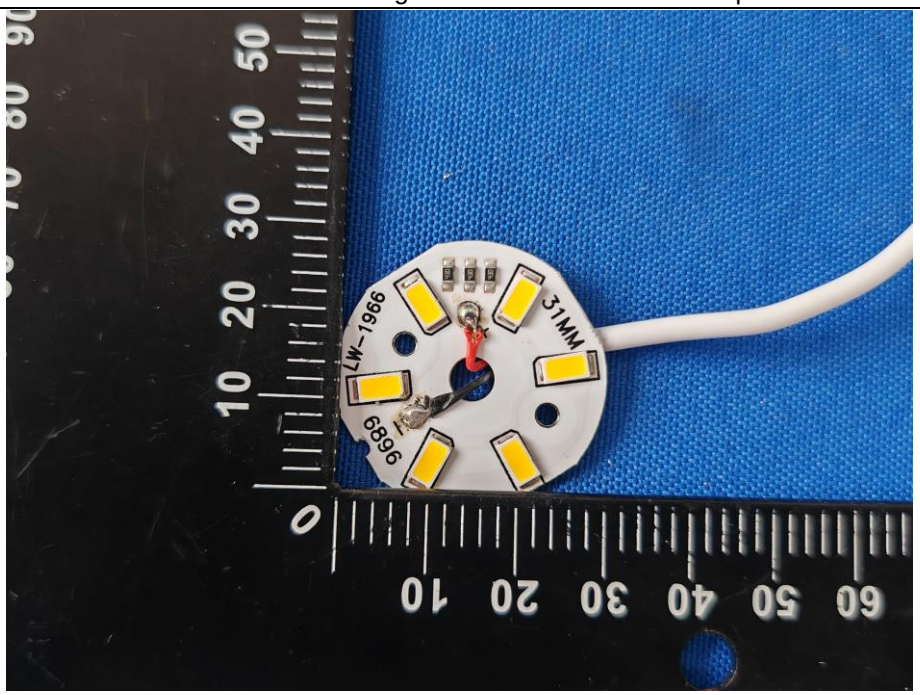

EUT View

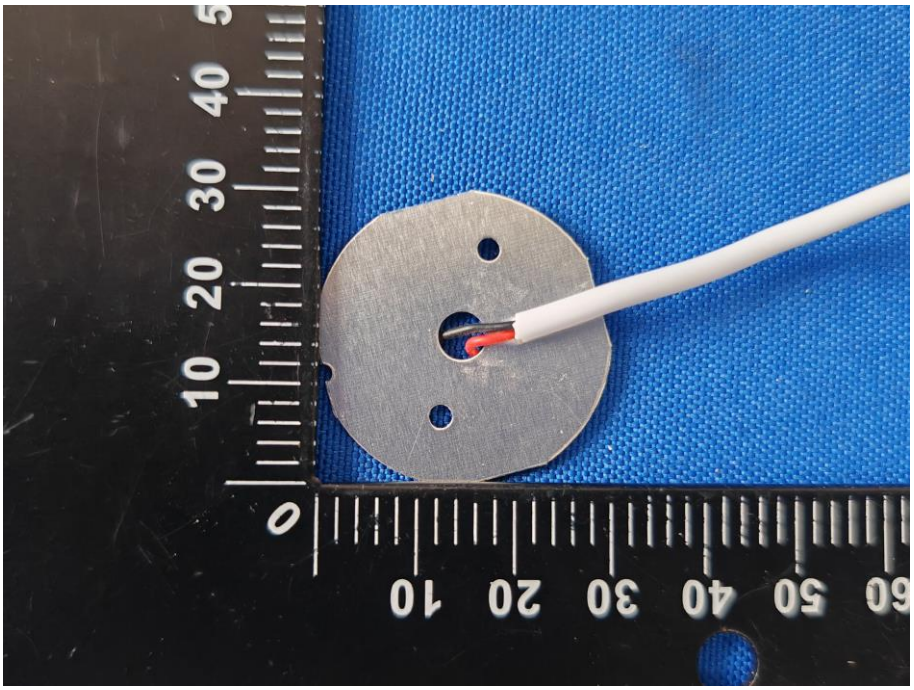

EUT View

----END OF REPORT----